

## PRIMECOAT SERIES 69

thermosetting powder coating  
epoxy  
zinc-rich primer

### Typical application

This material features good anti-corrosion properties. It is used as a primer for painting metal surfaces pre-treated with spray cleaning, when the item to be painted is exposed to a severe corrosion load.

### Product details

- Packages: carton with antistatic PE bag liner, 20 kg, 5 kg or Big Bag for approx. 500 kg, net
- Storage Stability: min 24 month from manufacture (see printed date on product label)
- Storage temperature: <25°C
- Specific Gravity (ISO 8130-2): 1.70-1.80 g/cm<sup>3</sup> depending on pigmentation
- Moisture content (ISO 8130-7): <0.4%
- Particle size distribution (ISO 8130-13):
  - fine fraction up to 10 µm in size: <10%
  - base fraction up to 32 µm in size: 25-45%

### Gloss level

- Primecoat 69: 75–100\*

\* Gloss level acc. to DIN EN ISO 2813/60° angle (doesn't apply to metallic effect powder coatings)

### Test results

Checked under laboratory conditions on a chromated 0.8 mm thick aluminium test panel.

Test method	Test	Primecoat 69
ISO 2360	film thickness recommended	60-150 µm
ISO 2409	cross cut test/adhesion 1 mm cutting distance	GT 0
ISO 1519	mandrel bending test cracking of coating	≤4 mm
ISO 2815	impression hardness	≥87
ISO 3668	coating color, deviation	≤1
ASTM D 2794	ball impact test cracking of coating (20 inch pound)	No cracks
ASTM D 2371	mass fraction of zinc pigment	at least 38%
ISO 6270-1	determination of resistance to humidity 1000 h	≤1 mm
ISO 9227	salt spray test 1000 h	≤1 mm

### Processing

Corona, Tribostatic\*

\* Available upon inquire.

## Pretreatments

Before the painting, the item should be adequately pretreated in accordance with surface type, final use and required performances. The following table can be used as starting point for the pretreatment choice. The surface shall be clean, dry and appear with a rough and dull profile.


Substrat	Indoor use
Aluminium	soil removal, chromate, chrome-free
Steel	soil removal, iron phosphate, zinc phosphate, sand-blasting
Zinc coated steel	acid attack, iron phosphate, chromate

Oxides (rust) cleaning and de-greasing shall be carried out when the simplified process is used! The simplified pre-treatment does not ensure necessary protective properties and decreases the service life of the coating. Hot-dip galvanized steel requires additional mechanical processing (incision).

## Cure parameters

Temperature and time combinations resulting in the optimal cross-linking of the coating.

Typical curing

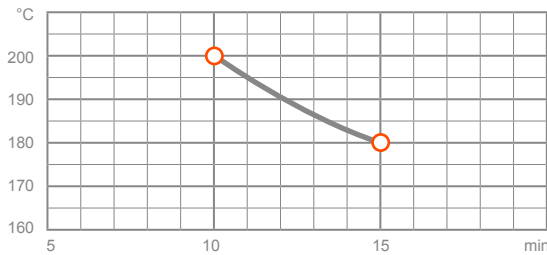

Please observe cure parameters closely since mechanical properties will develop before full cross-linking!

To obtain optimal stoving conditions you are recommended to carry out practical trials each time, adapted to the carry out practical trials each time, adapted to the object in question and the stoving oven. Temperature conditions of curing for each powder listed on the label.

**Our technical service department will be glad to advise you.**

## Note

The data is provided for information purposes and is not exhaustive. The customer using the product otherwise than indicated in the data sheet takes responsibility for the results obtained. As the manufacturer, we provide more precise product description, conditions of usage and all the application process accompanying factors. Due to the fact that direct control on our part cannot be effected in regards to the following of the aforementioned conditions, unless an additional written agreement is made, we offer no guarantees and hold no responsibility for the products usage and the results obtained.

### Address:

Primatek Coatings OÜ  
Kadastiku 29A  
21004 Narva, Estonia

### Contact:

Phone +372 655 1010  
primatek-coatings.com

### Bank details:

Swedbank AS:  
EE87 2200 2210 5686 9100